Quasi-Omnigenous Stellarator (QOS) Design Status

D. A Spong, S. P. Hirshman, J. F. Lyon, D. B. Batchelor,
R. D. Benson, B. A. Carreras, T. C. Jernigan, V. E. Lynch,
B. E. Nelson, R. Sanchez, J. C. Whitson
Oak Ridge National Laboratory
P. M. Valanju, W. Miner, D. W. Ross
University of Texas
M. C. Zarnstorff, D. A. Monticello
Princeton Plasma Physics Laboratory
A. S. Ware
University of Montana, Missoula, Montana
L. Garcia
Universidad Carlos III de Madrid

National Compact Stellarator Experiment
Informal Program Advisory Committee Meeting
Princeton, Plasma Physics Laboratory
December 2-3, 1998
Princeton, New Jersey

Overview and Motivations

- We are developing a modest-sized (R_0 = 1 m, B_0 = 1 T) experimental stellarator design based on the Quasi-Omnigenous (QO) optimization technique

- These studies are the first step towards understanding the physics of compact, low aspect ratio stellarators

- Significant progress has been made toward this goal
  - Experimental tests of these design concepts will be essential
  - Ongoing optimization effort is required to develop the concept's physics and engineering features to their full potential

- This talk will report progress in the areas of
  - coil design (preserves flux surfaces and physics properties)
  - core transport, confinement of ICRF heated populations
  - bootstrap current
  - stability

ornl

The QOS Program uses innovative methods to develop compact stellarator devices:

- Quasi-Omnigeneity (QO) is a promising approach to improving transport in stellarators
  - approximately aligns bounce-average particle drift surfaces with flux surfaces
- Can do this at considerably smaller aspect ratio (A = 3-4) than W7-X stellarator (A = 10-11)
  - <u>and maintain</u>: good neoclassical confinement, high ballooning and kink stability limits, good energetic orbit confinement
- QOS concept exploration experiment is proposed to test the QO approach
  - will determine the optimum QO coil set to be tested in the second stage of the NCSX POP facility.
- Parameters are: $\boldsymbol{R}_0$ = 1 m, $\langle \boldsymbol{a} \rangle$ = 0.28 m, $\boldsymbol{B}_0$ = 1-2 T, $\boldsymbol{P}_{ECH}$ = 0.6 MW, $\boldsymbol{P}_{ICRF}$ = 3 MW, $\boldsymbol{P}_{LH}$ = 1 MW, and $\boldsymbol{t}_{pulse}$ = 4 s (at 1 T) and 1 s (at 2 T).
- Program focus: improvement of neoclassical and anomalous confinement, use of external coils rather than bootstrap current to create most of the poloidal field.

ornl

Quasi-omnigeneity is a stellarator optimization technique complementary to quasi-symmetrization methods.

- Symmetries in |B| → constant of the motion
- Quasi-symmetry → single dominant helicity
- J* (omnigeneity) → longitudinal adiabatic invariant

Quasi-omnigeneity: $\langle \vec{v}_D \cdot \vec{\nabla}\psi \rangle \quad \partial J^* / \partial\theta \quad \oint \kappa \times \hat{n} \cdot \vec{\nabla}\psi$

→ approximate $J^*(\psi)$

no single dominant helicity

Allowing multiple helicities provides flexibility for:

- reduction of finite β bootstrap current

ornl

Evolution of Quasi-Omnigenous Devices

- QO configurations exist “in the neighborhood” of quasi-symmetric configurations
- Recently the QO has been used to extend nearly quasi-helical devices to low A

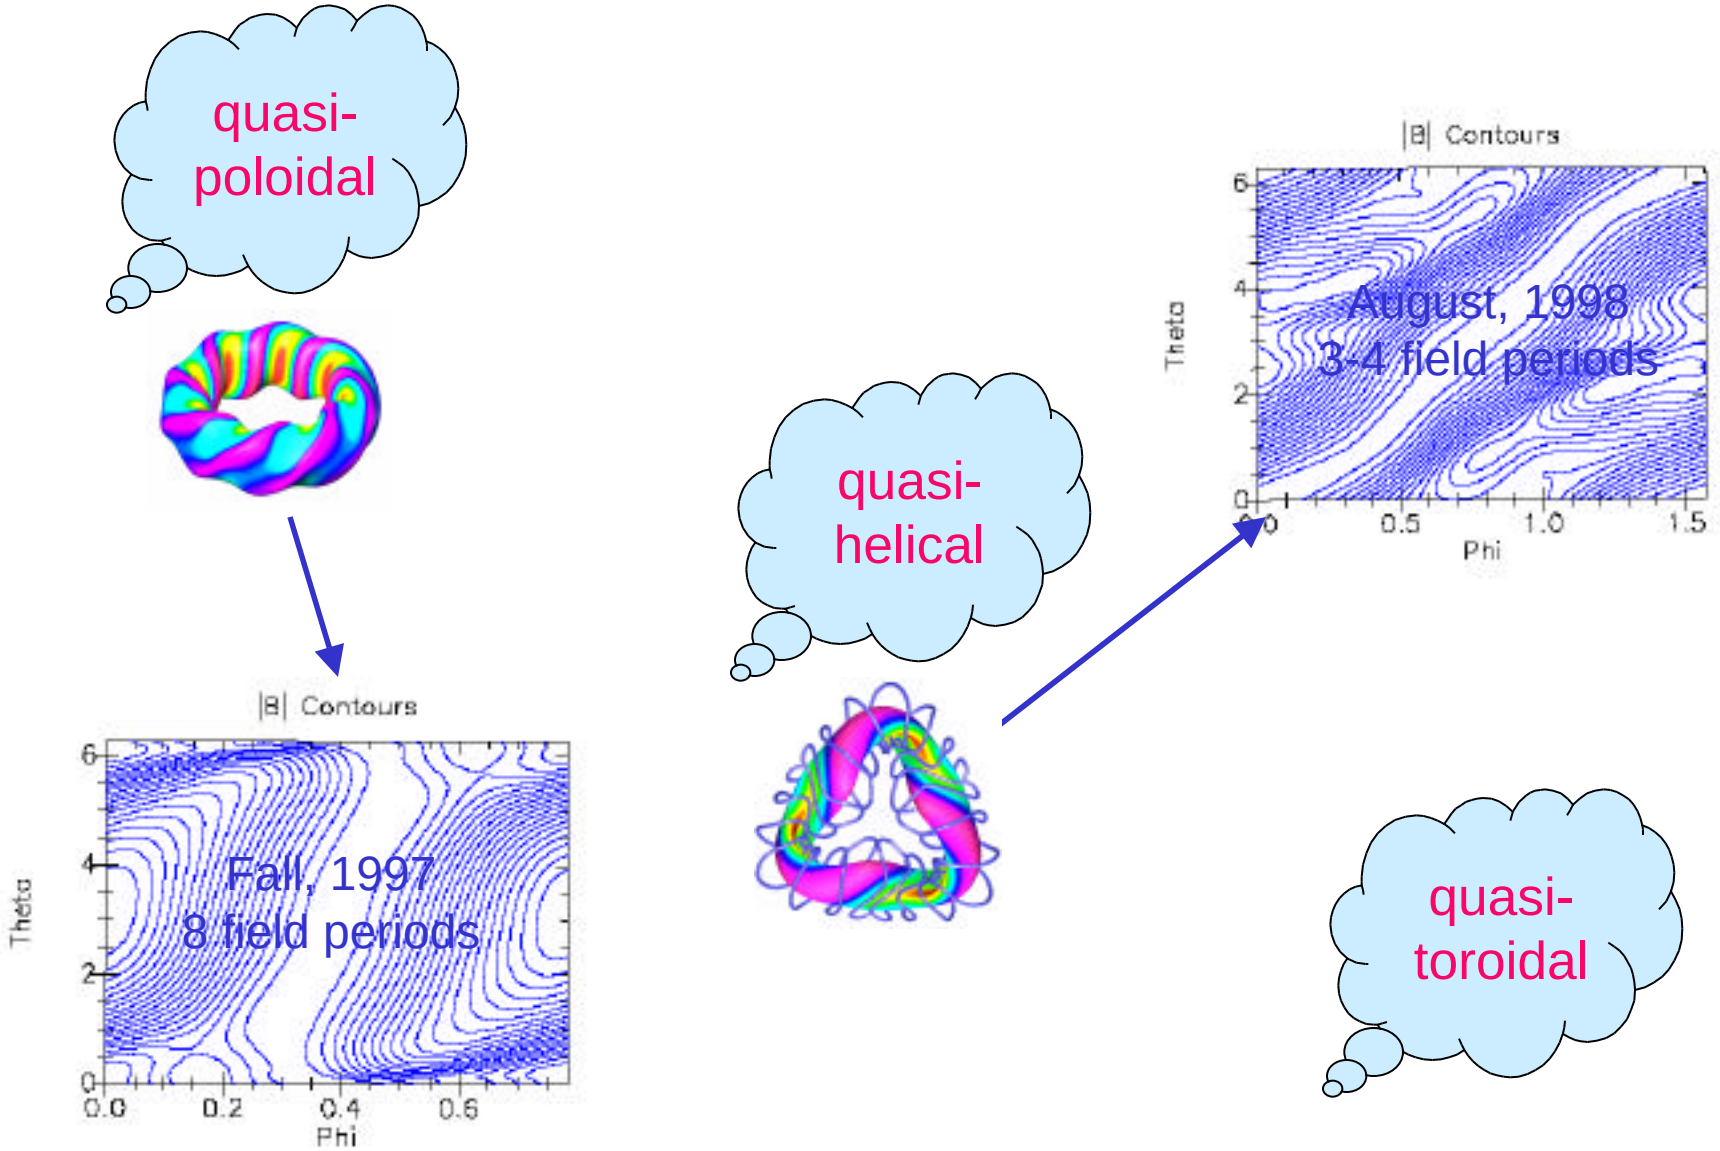

Stellarator optimization loop determines outer flux surface shape. Coils which produce this shape are next derived:

Initial configuration: equilibrium from simple modular coils

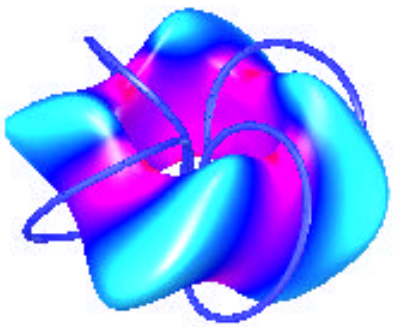

Adjust boundary shape and current density profile

Solve VMEC equilibrium

Convert to Boozer coords.

Calculate χ^2

Levenberg-Marquardt Minimize χ^2

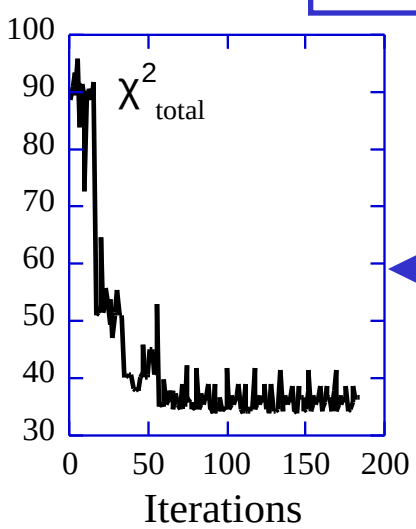

Final optimized configuration:

NESCOIL
COILOPT

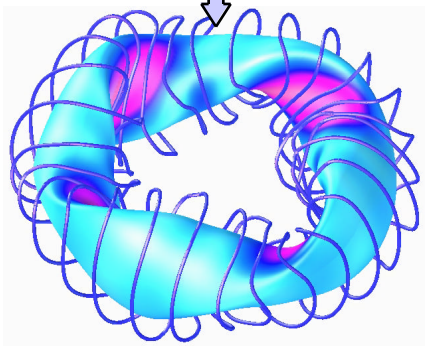

QO configurations are based on a well–developed set of physics/engineering optimization targets

- Confinement is improved by aligning J $\int v_{\|} dl$ surfaces (trapped orbit trajectories) with magnetic surfaces:

poor confinement good confinement

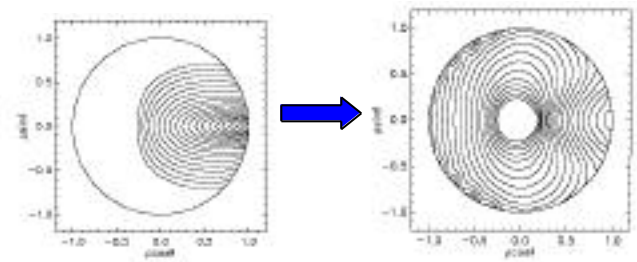

- Stability: maintain magnetic well, Mercier, ballooning stability
- Transform profile: $0.5 < \iota < 0.8$, $d\iota/dr > 0$ with low bootstrap current
  - avoid resonances, positive transport scaling with i, avoid neoclassical island growth
- Coil optimization (separate from outer surface optimization)
  - maintain adequate coil/plasma separation, good surface reconstruction

ornl

A New Concept Exploration Experiment, QOS, Is Needed to Test Quasi-Omnigeneity

- Broaden the scientific base on the quasi-symmetry being tested in HSX and NCSX into low-aspect-ratio non-symmetric stellarators
- Test reduction of neoclassical transport via nonsymmetric quasi-omnigeneity, and the effect of radial electric fields on confinement
- Test reduction of energetic orbit losses in non-symmetric low-aspect-ratio stellarators
- Test reduction of the bootstrap current and the configuration independence on β
- Test methods to affect anomalous transport, such as producing sheared E x B flow, and understand flow damping in non-symmetric configurations

Requirements for Medium-Scale Experiment to Test the QO Optimization Principle

- **Adequate neoclassical confinement**
  - **transport reduced by factor of ≥ 2 relative to ISS95 to allow clear tests of enhanced confinement regimes**
  - **allow tests of improvement with ambipolar electric field**
  - **good reactor extrapolation**
- **Good confinement of energetic trapped ions**
  - **Viable ICRF heating efficiency**
  - **Adequate alpha-particle confinement for reactor extrapolation**
- **Bootstrap current provides < 30% of total transform**
  - **test configuration independence of β**
  - **demonstrate low risk of disruptions**
- **Adequate size, field, and pulse length so ISS95 scaling permits tests at relevant parameters (n, T, ν^*, $\langle\beta\rangle$)**
- **Coil sets with sufficient access for heating, diagnostics**
  - **3 or 4 field periods with 5-7 modular coils per period**
  - **$\langle a\rangle \sim 0.28$ m, $B_0 = 1 - 2$ T, pulse ≥ 1 second**

ornl

Quasi-Omnigenous Stellarator

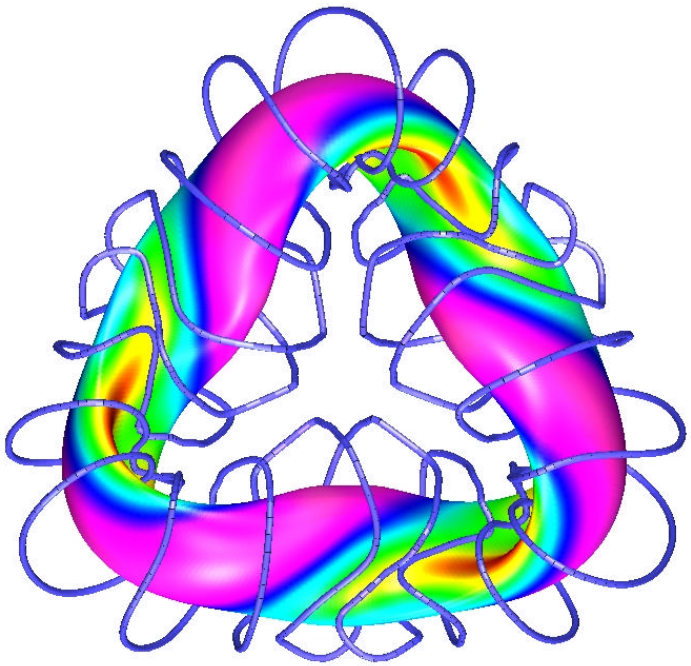

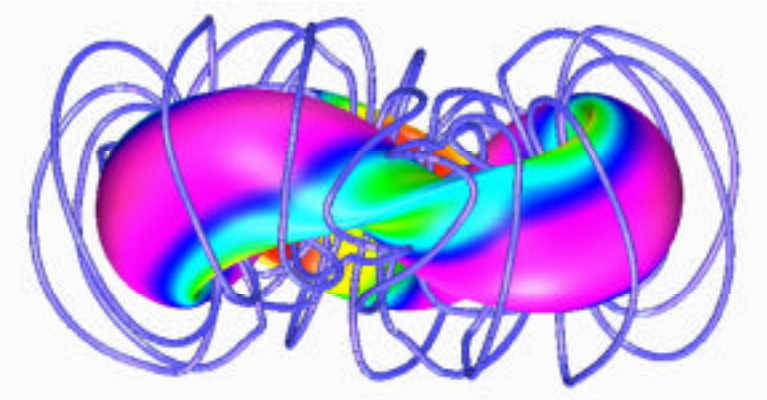

- $R_0 \leq$ 1.0 m
- $\langle a \rangle \leq$ 28 cm
- $R_0/\langle a \rangle \approx$ 3.6
- Volume $\leq$ 1.6 m^3
- B_0 1 T ($\leq$ 4 s)
- 2 T ($\leq$ 1 s)?
- Plasma Heating (10 s)
  - 0.6 MW; 53.2 GHz
  - 2 MW; 6-20+ MHz
  - 1 MW; <40-80 MHz
  - 1 MW; 2.45 GHz

ornl

QOS Plasma Performance

- **Consistent Sets of Plasma Parameters***

Plasma Parameter	0.4-MW ECH			1-MW ICRF		2.5-MW ICRF	
B_0 (T)	1	1	2	1	2	1	2
n_e ($10^{19}m^{-3}$)	1.6[(a)]	3.2[(b)]	3.2[(c)]	11	15	17	24
τ_E (ms)	17	24	43	26	56	19	41
β (%)	0.7	1.0	0.5	2.8	1.5	5.2	2.8
T_{e0} (keV)	3.4	2.4	4.3	1.0	1.5	1.1	1.7
T_{i0} (keV)	--	--	--	1.0	1.5	1.1	1.7

- [(a)] 2nd harmonic X-mode
- [(b)] O-X electron Bernstein wave mode conversion
- [(c)] O mode fundamental

* based on ISS95 stellarator scaling with a confinement

* improvement factor H = 2 (H = 1.4 - 3 obtained in W7-AS)

- τ_E (ISS95) = H x $0.079\langle a\rangle^{2.21} R^{0.65} P^{-0.59} n^{0.51} B^{0.83} i^{0.4}$
- assumes τ_E (neoclassical) > several times τ_E (ISS95)

ornl

QOS Research Program Goals

- **Reduction of anomalous transport ⇨ H > 2**
  - **profile control, sheared E x B flow using ICRF**
- **Reduction of energetic orbit losses and neoclassical transport in low-A, non-symmetric configurations**
  - **modification of |B| Fourier components with auxiliary coils to spoil the optimization**
  - **modify radial electric field with ICRF, biased probes**
- **Study control of the bootstrap current**
  - **cancellation by different |B| harmonics, dependence on ι**
  - **test configuration independence on β**
- **Study stability at low β (< ~1.5%)**
  - **turbulence spectra, kink stability with OH driven current**

Recent 3 and 4 field period QO configurations

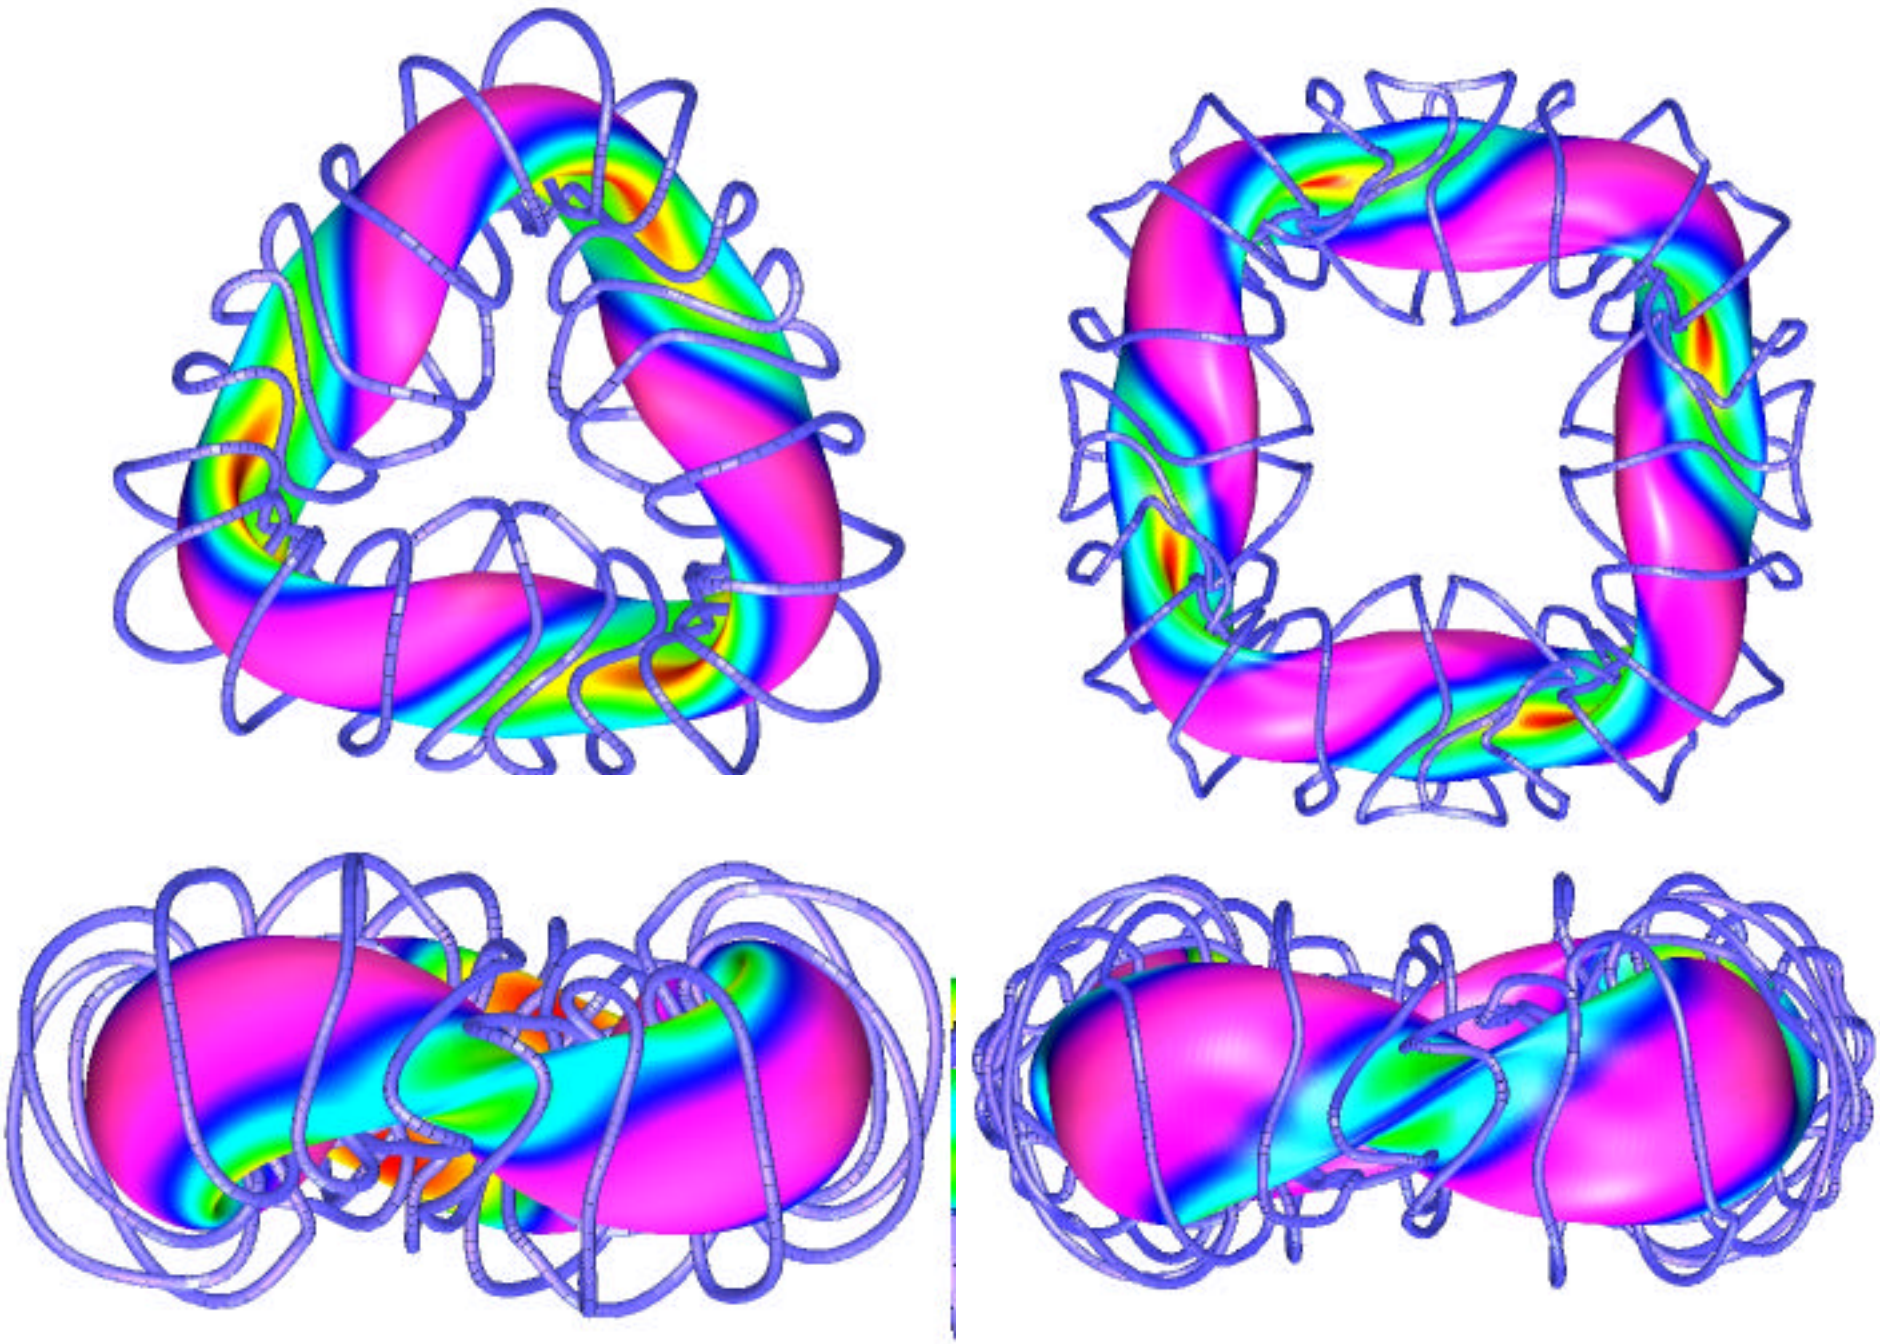

Excellent flux surface reconstruction is obtained using modular coils generated by the COILOPT code:

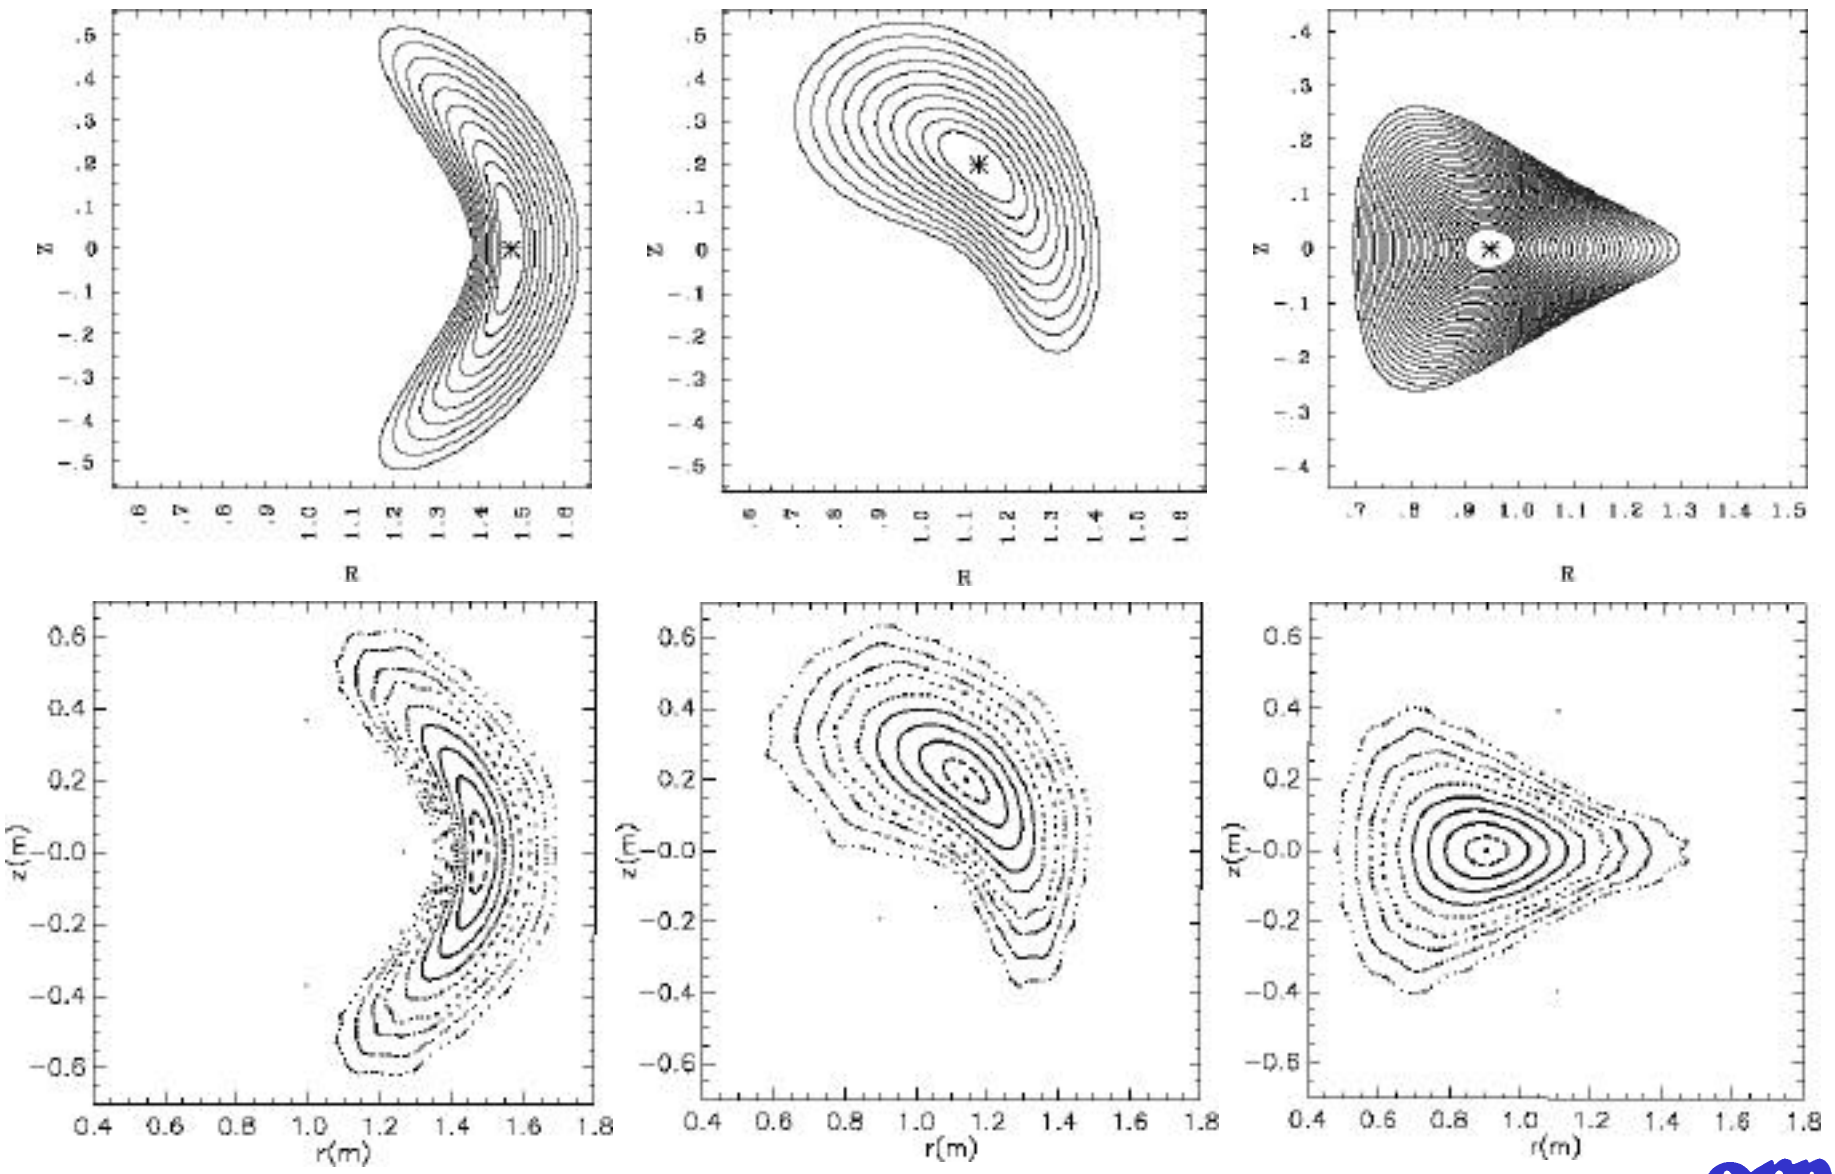

Rotational transform and Mercier coefficient profiles for N_{fp} = 3 and 4 configurations

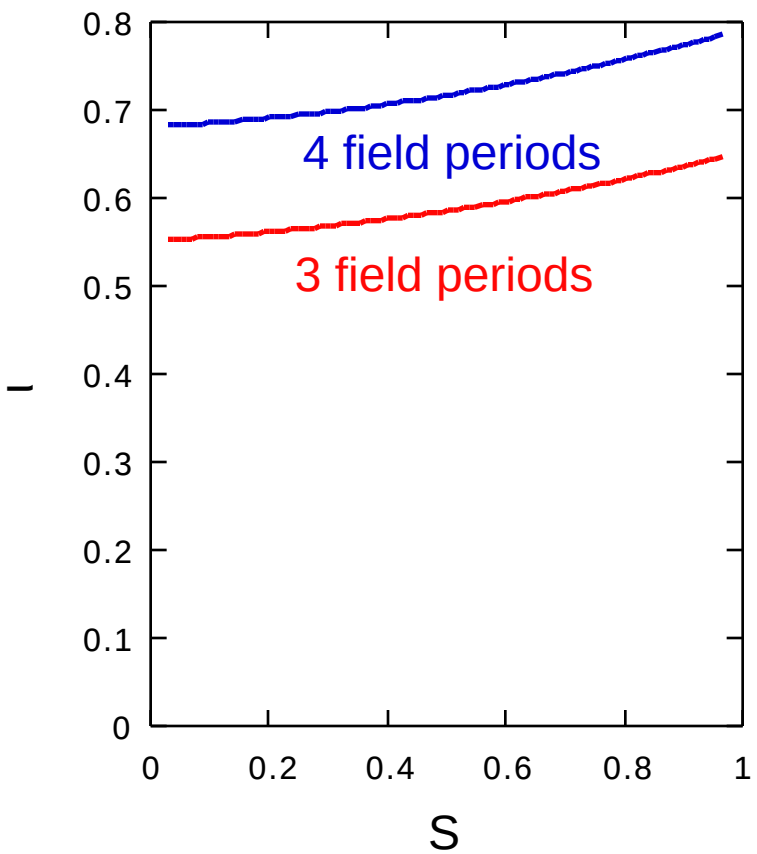

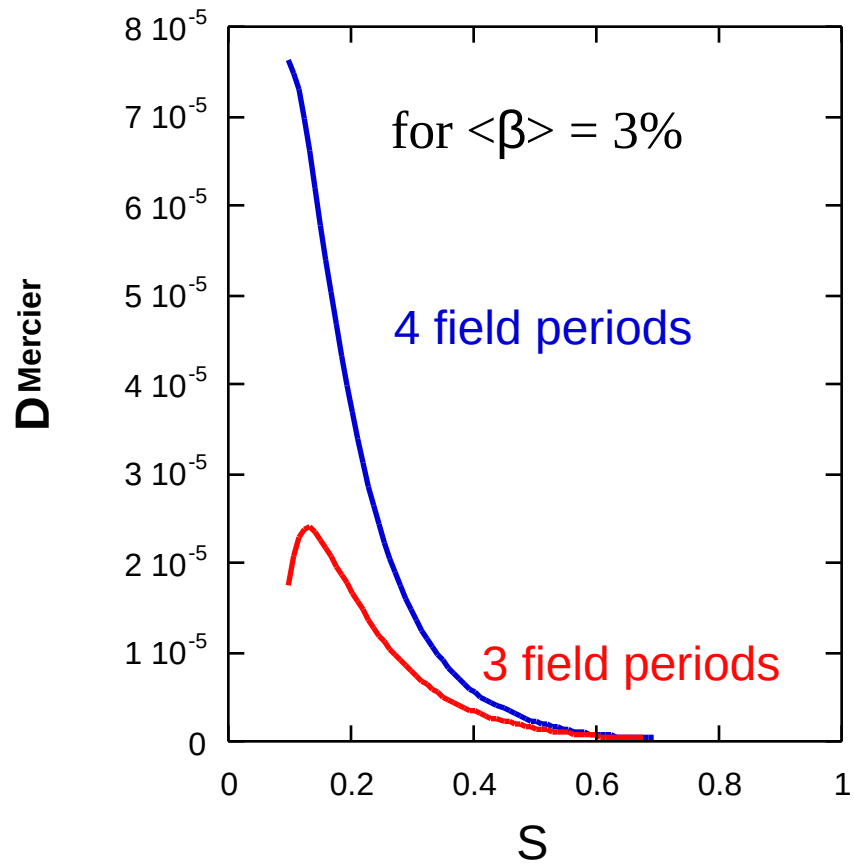

The B_{mn} spectra show that the helical component is dominant. The 1/R term is down from its axisymmetric tokamak level about a factor of 4.

Note: For these cases, $B_{0,0} \approx 1$

$N_{fp} = 3$, $R_0/\langle a \rangle = 3.6$

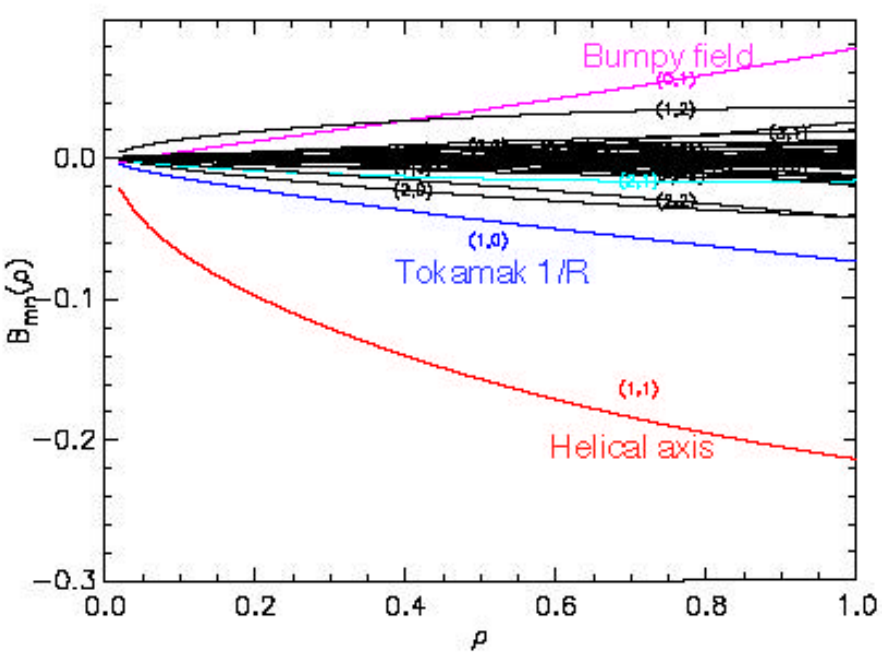

$N_{fp} = 4$, $R_0/\langle a \rangle = 4.2$

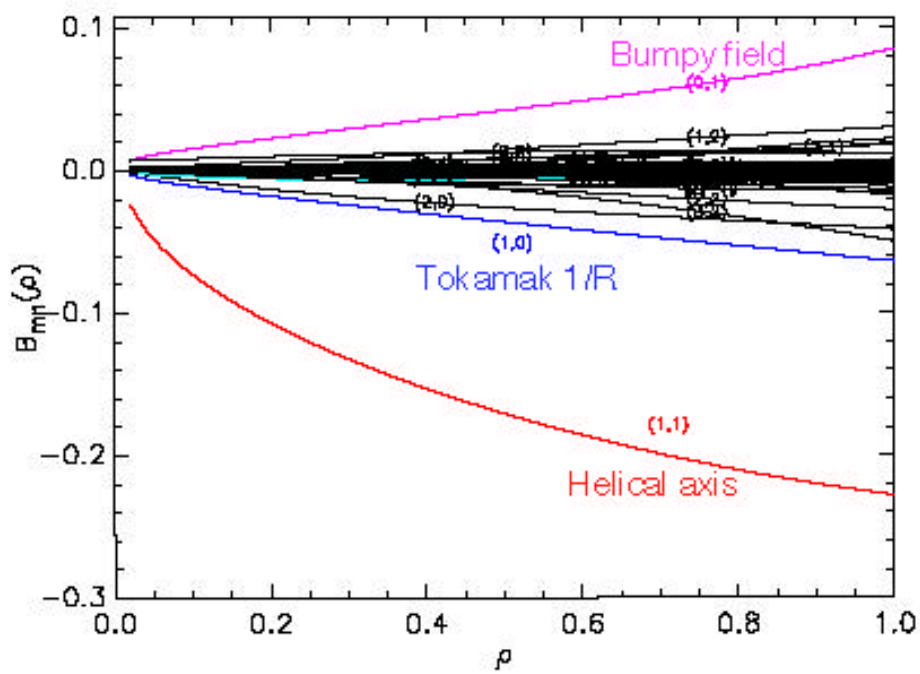

Effectively a hybrid of W7-X and HSX: strong helical component is like HSX, bumpy component is like W7-X

ornl

Tools used/available in the analysis of QO configurations:

- Optimization, 3D equilibrium: VMEC
- Transport, confinement
  - DELTA5D (ORNL Monte Carlo Code)
  - FAFNER-2 (IPP/CIEMAT parallel Monte Carlo code for the T3E)
  - SYMPORBIT (symplectic orbit integrator)
  - J*, B_{min}, B_{max} contour plotting
- Stability
  - COBRA (fast matrix/variational 3D ballooning, R. Sanchez)
  - CHAFAR (Averaging method)
  - Resistive MHD for 3D configurations (L. Garcia)
- Bootstrap Current
  - Collisionless limit
  - NIFS multi-regime code
- Coil Design
  - COILOPT
  - NESCOIL

ornl

Energetic Collisionless Orbit Confinement

- ICRF tail populations
  - –ensemble of particles started out at $B = B_{res}$ locations with $\varepsilon/\mu = B_{res}$ (i.e., $v_{||0} = 0$)
- Beams
  - – particles born as beam ionizes on intersection with 3D flux surfaces
- Alpha -particles
  - – uniform distribution in $v_{||0}/v$, θ, ζ
- Two issues:
  - – losses due to localized regions of unclosed J* contours (all stellarators, even W7-X, Helias, etc., we have studied have this to some extent)
  - – deviation of energetic particle guiding center orbits away from J* contours (becomes larger proportional to $\rho/\langle a\rangle$)

ICRF heating in stellarators depends on wave propagation, geometry of the resonant regions and the orbit confinement of the resonant ions

- Confinement of ICRF heated ions is examined by following ~500 orbits
- Intersections of |B| contours with flux surfaces are determined for inner half of the plasma volume
- Ions are started out at $B = B_{res}$ with $v_{||0}/v = 0$ (equivalent to $\varepsilon/\mu = B_{res}$)
- Ions leaving the outer surface are removed from the population

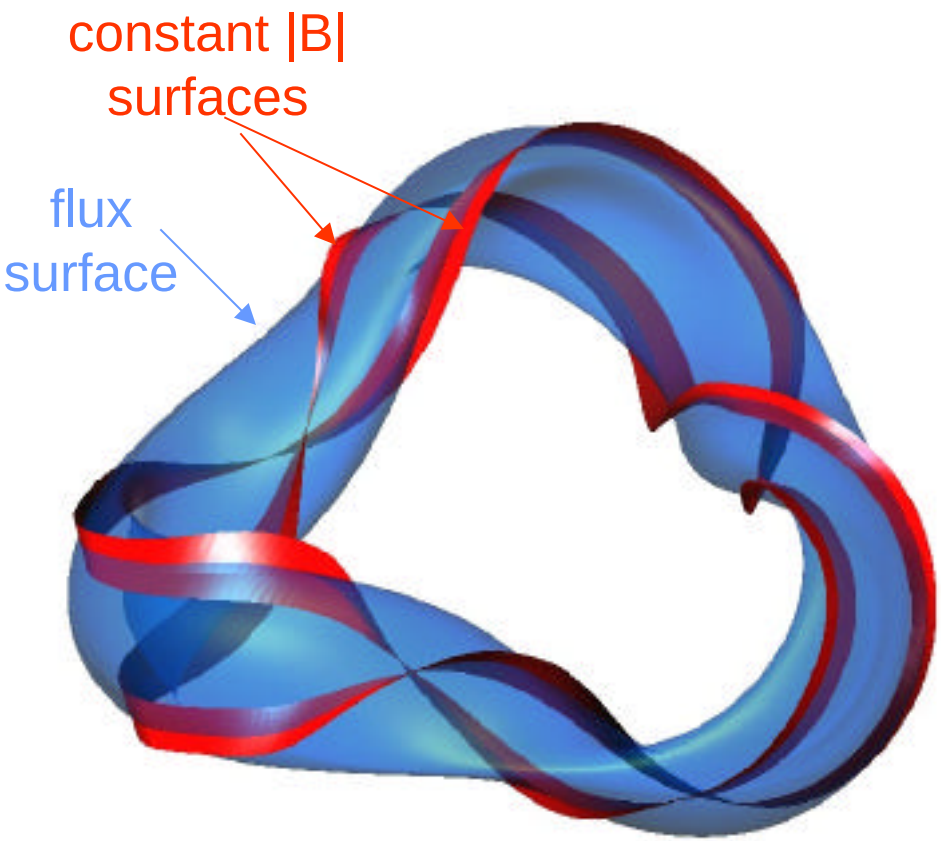

ornl

Loss rates of 20 keV ICRF ion populations (500 particles) are a sensitive function of the resonant magnetic field $B_{res} = \varepsilon/\mu$

$N_{fp} = 3$

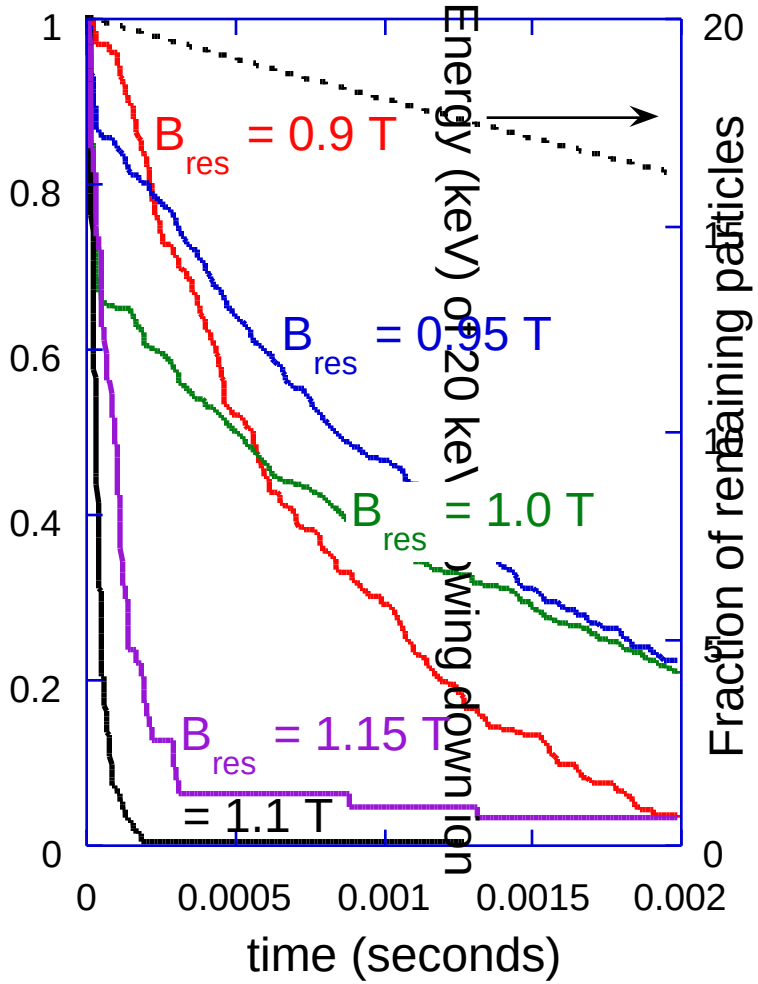

$N_{fp} = 4$

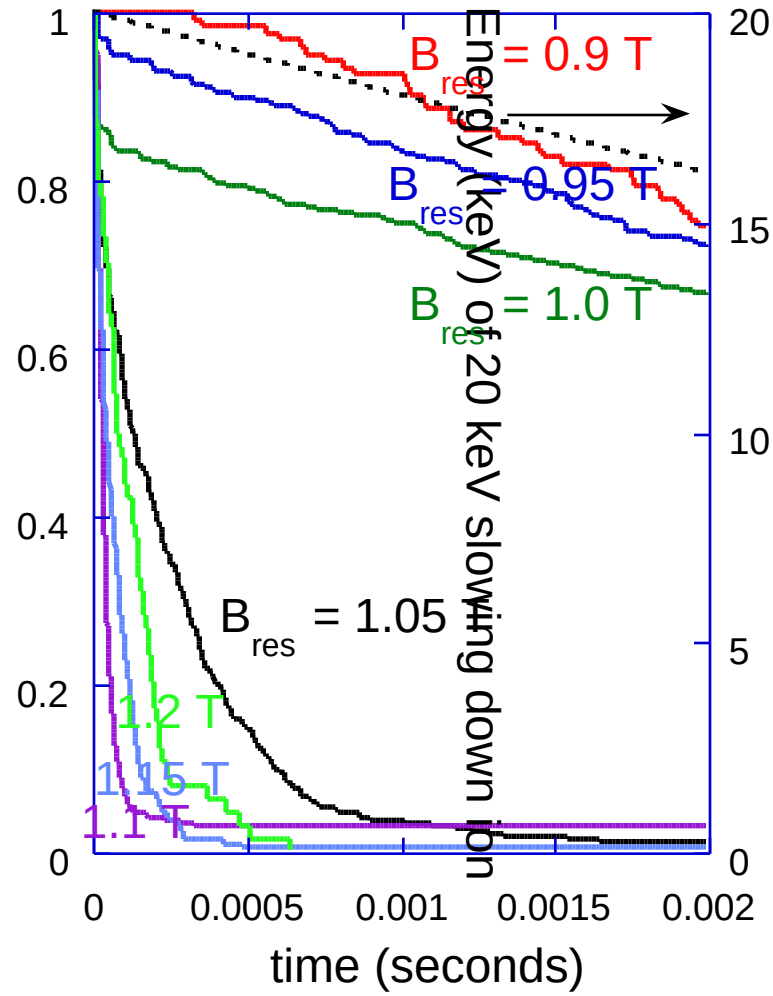

Increasing the magnetic field can significantly improve the confinement of trapped ICRF tail populations:

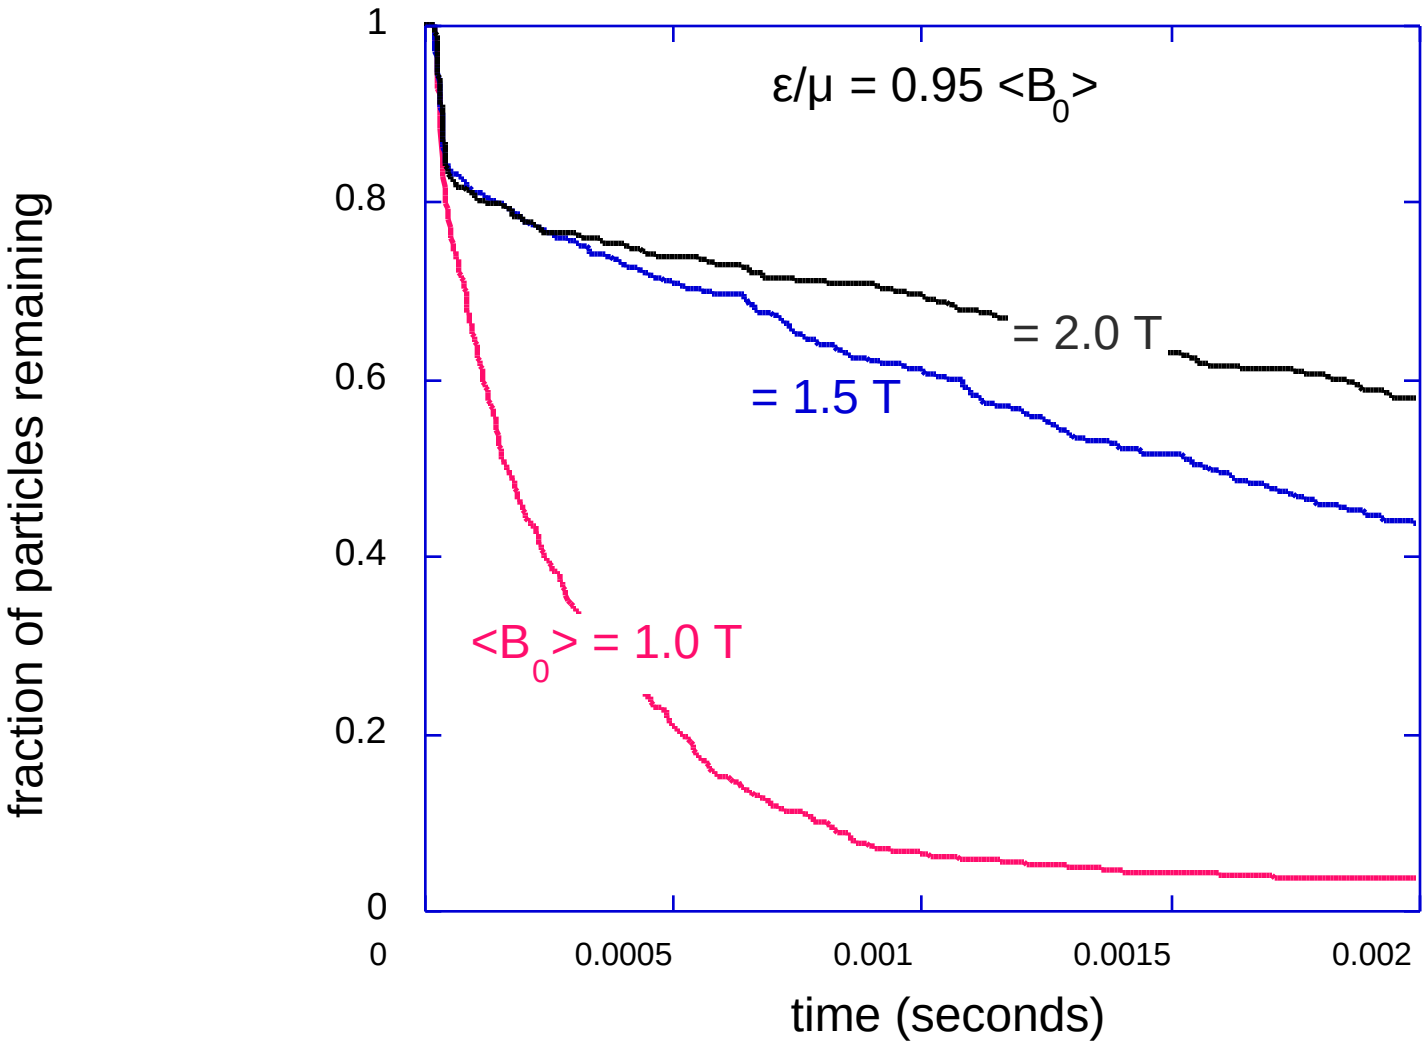

ornl

Scaling with <a>/ρ of deeply Trapped proton orbit trajectories in a B = 1T N_{fp} = 3 QOS Device (shown in Boozer coordinates):

J* surfaces

GC Orbit

5 keV

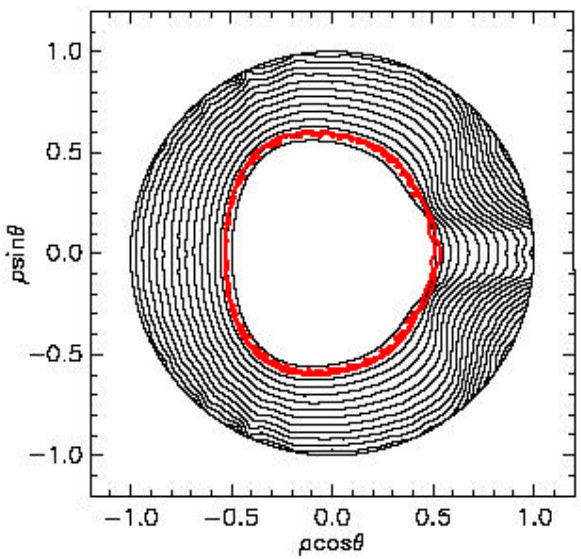

<a>/ρ = 27

20 keV

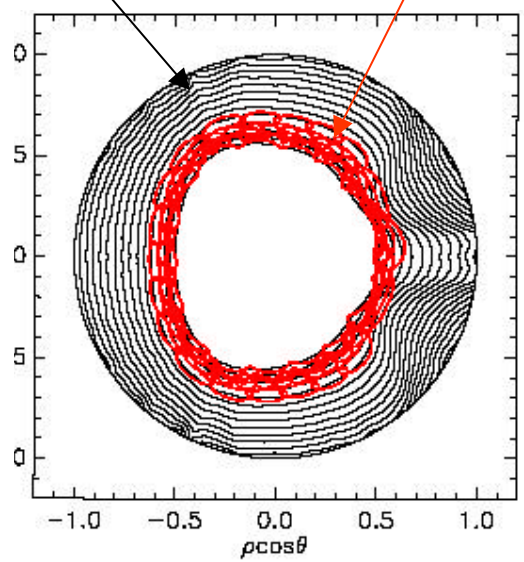

<a>/ρ = 13.5

50 keV

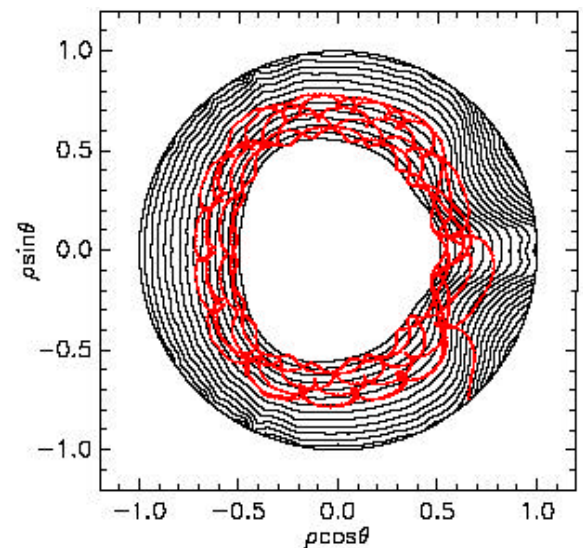

<a>/ρ = 8.5

Confinement of heating populations in near term devices can be more demanding than alpha confinement in reactor-sized systems:

- 20 keV proton B = 1T <a> = 24 cm
  ρ = 2 cm <a>/ρ = 12

- 3.5 MeV alpha B = 5T <a> = 2 m
  ρ = 5.4 cm <a>/ρ = 37

- Prompt orbit losses are determined by:
  - Closure of J* contours
  - degree of adiabaticity - related to size of <a>/ ρ

ornl

Collisionless α-particle losses are calculated for a reactor-scale version of the N_{fp} = 3 and 4 configurations

(i.e., R_0 = 10 m, B_0 = 5 T, results are based on 500 α-particles per surface)

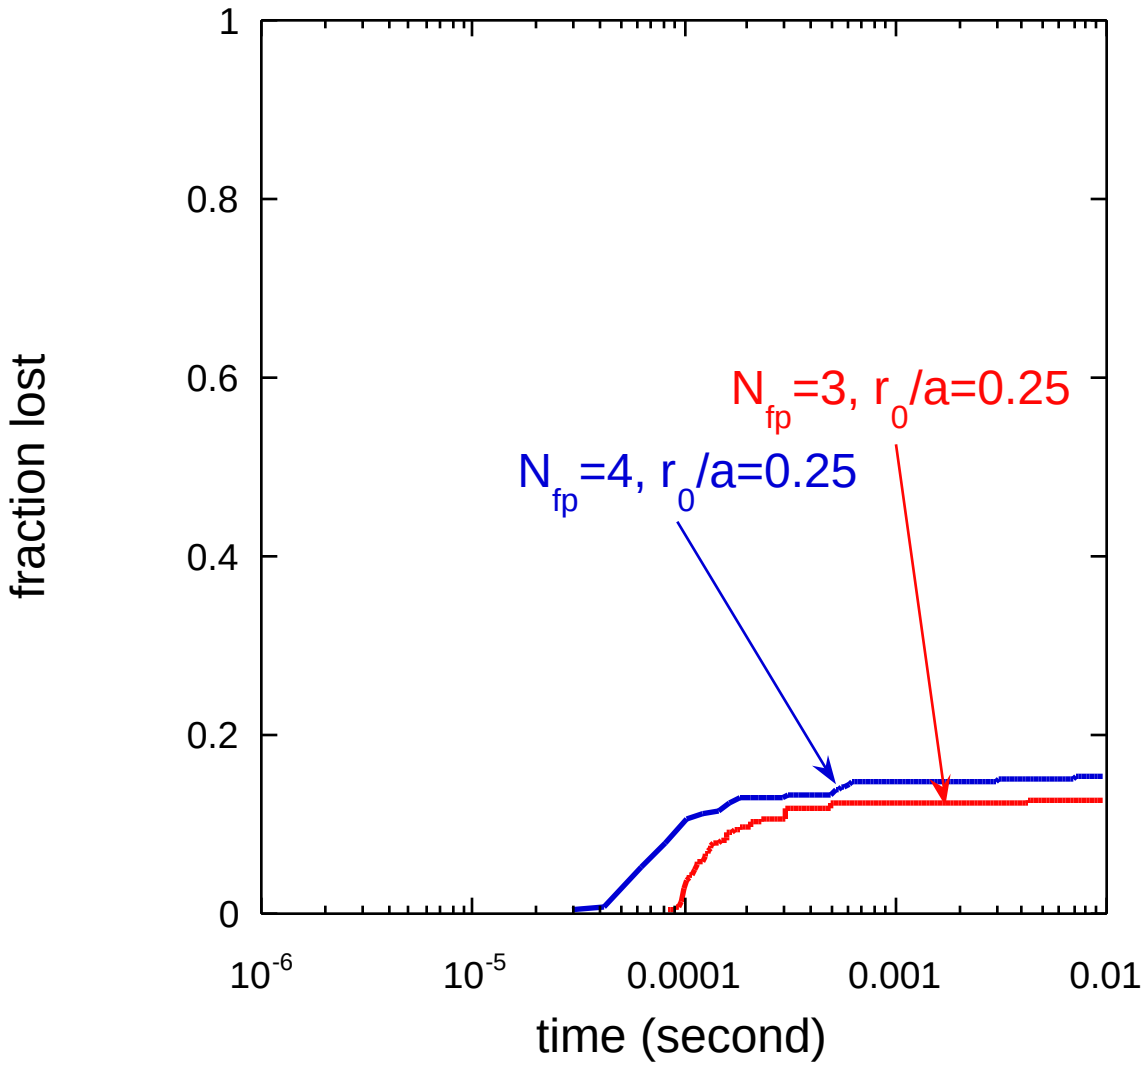

Note:

- These will be extended to $\tau_{SD} \approx 1$ sec with collisional effects
- This design has not yet been fully optimized for a reactor

Neoclassical Transport

Collisionality scaling of the diffusivity for N_{fp} = 3 and 4 devices shows a decrease with n for n < 10^{14} cm^{-3}

- T_{field} = 1 keV, E_{test} = 2 keV, Z_{eff} = 1, (monoenergetic, 2000 particles)
- No ambipolar electric field
- N_{fp} = 3
  - $0.006 < \nu_{eff}/\omega_b < 0.115$
  - $34 < L^* < 680$
- N_{fp} = 4
  - $0.004 < \nu_{eff}/\omega_b < 0.08$
  - $42 < L^* < 835$
- where $L^* = \lambda/L_c$, $L_c = \pi R_0/\iota$, λ = mean free path, $\nu_{eff} = \nu/\varepsilon_H$, ω_b = bounce frequency

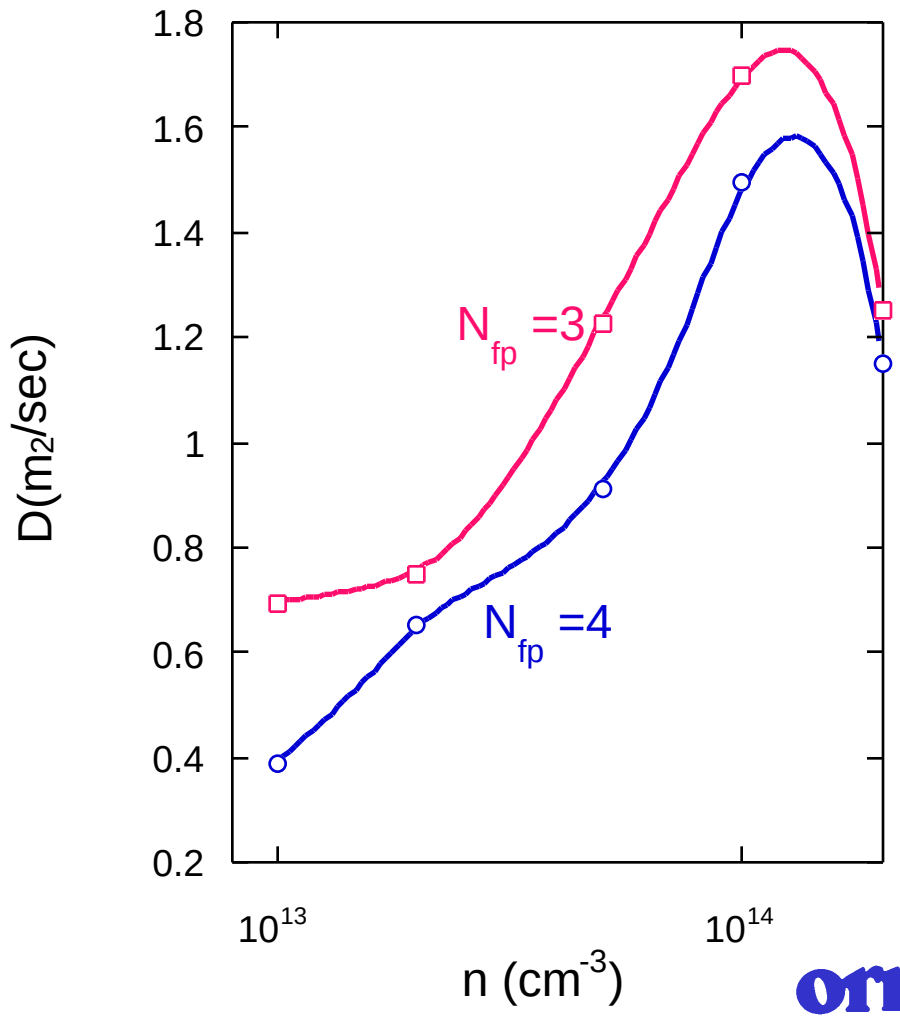

The diffusivities and 0-D energy confinement time show a strong dependence on electric field with $\tau_E \approx (2\text{-}3)\times\tau_{ISS95}$ for typical ambipolar potentials

- N_{fp} = 4 configuration
- 4 monoenergetic ion Monte Carlo groups used (2000 particles each) to construct diffusivities for a Maxwellian
- T_{field} = 1 keV, E_{test} = 0.5, 1, 2, 3 keV, n = 5×10^{13} cm^{-3}, Z_{eff} = 1
- Starting position: ψ/ψ_a = 0.25 (r/a = 0.5)

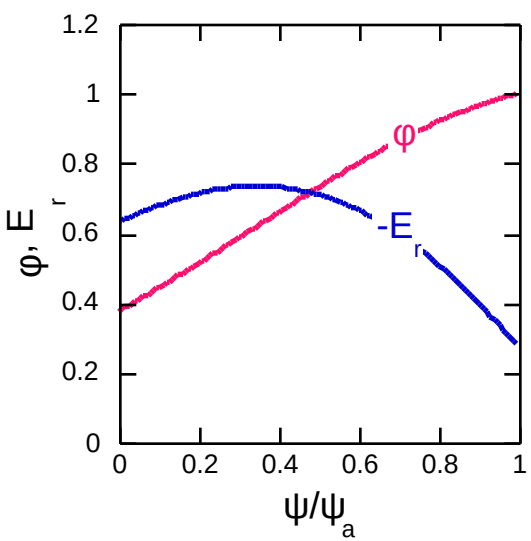

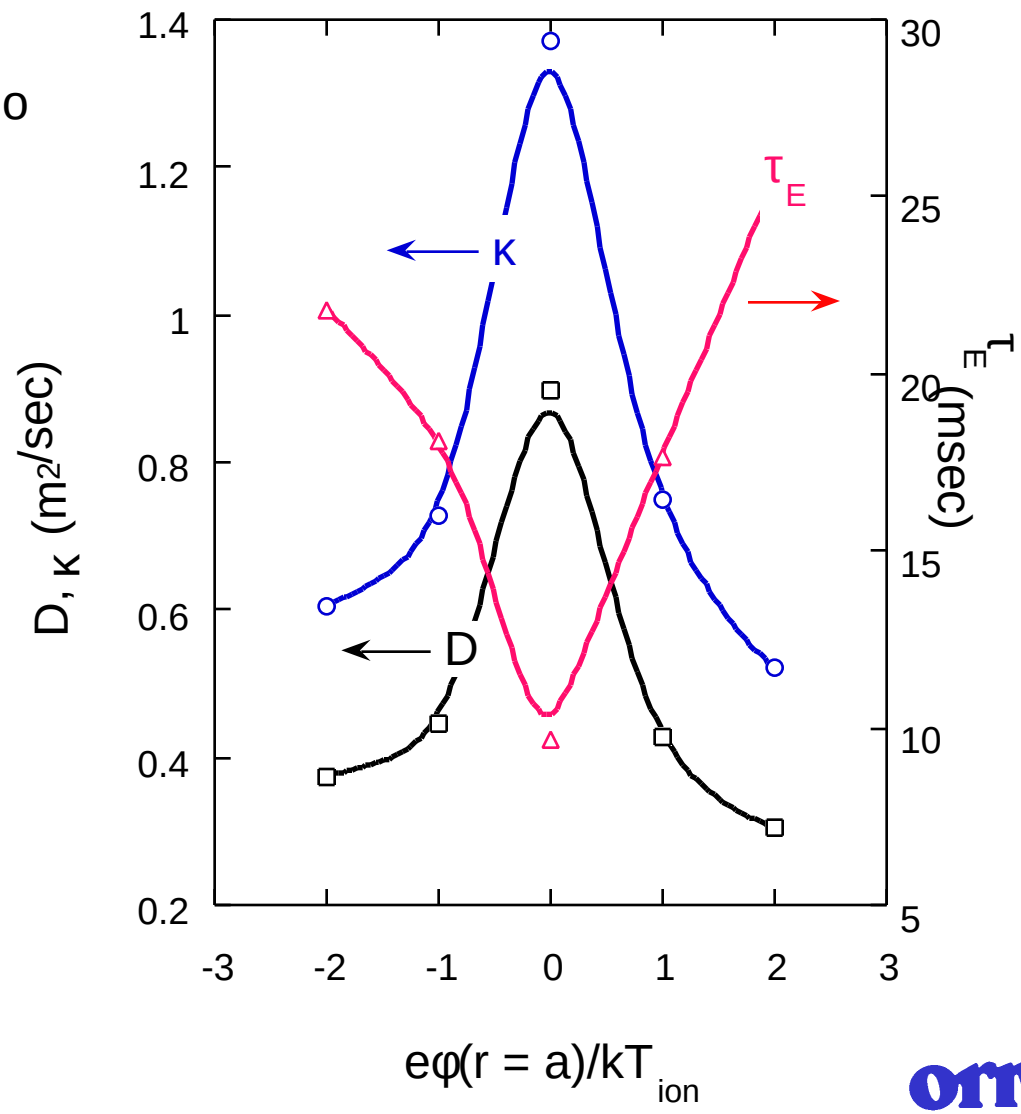

Bootstrap Current

QO configurations allow flexibility with respect to the level of bootstrap current

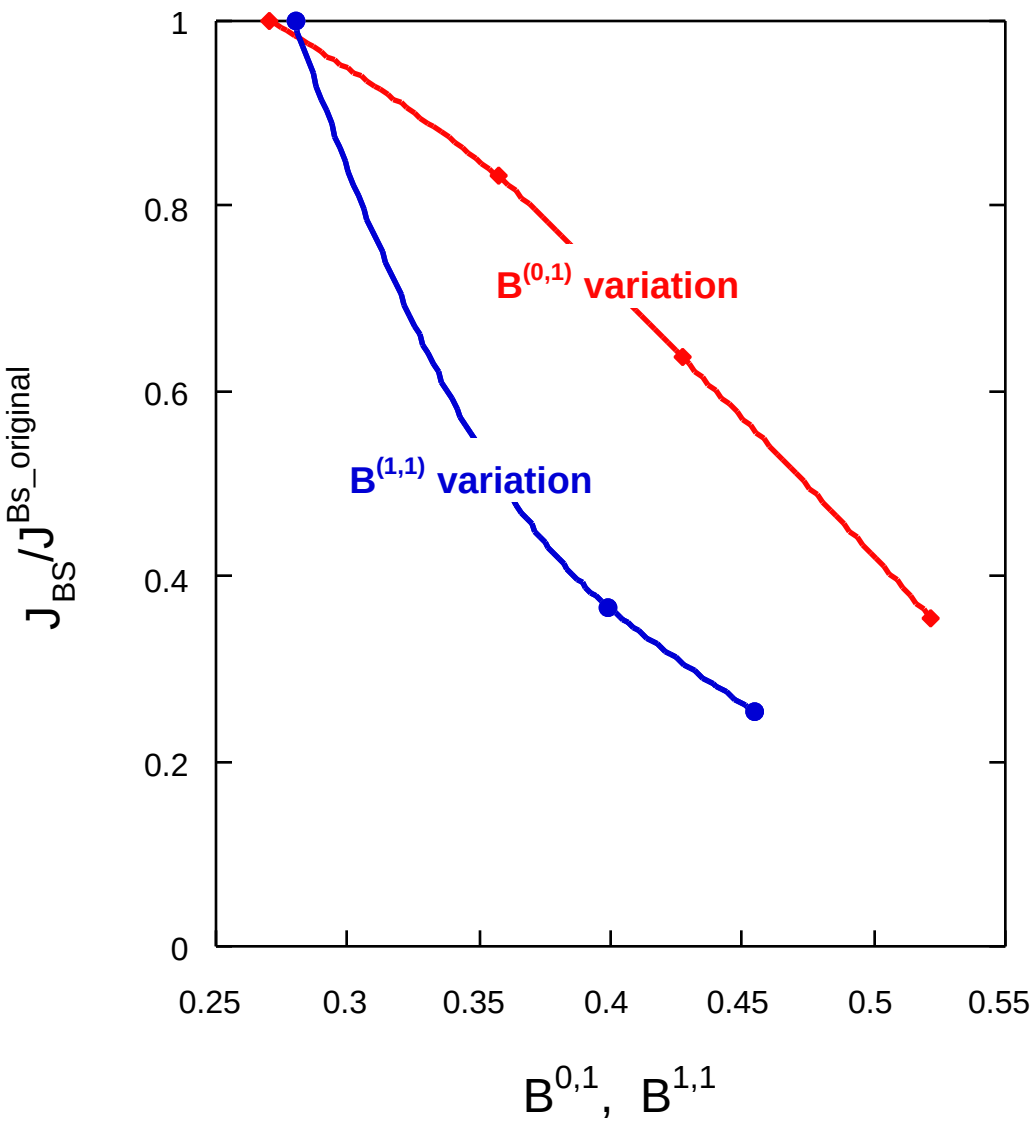

The transform and J* surfaces of the 3 field period QO configuration are not strongly modified by various levels/signs of bootstrap current

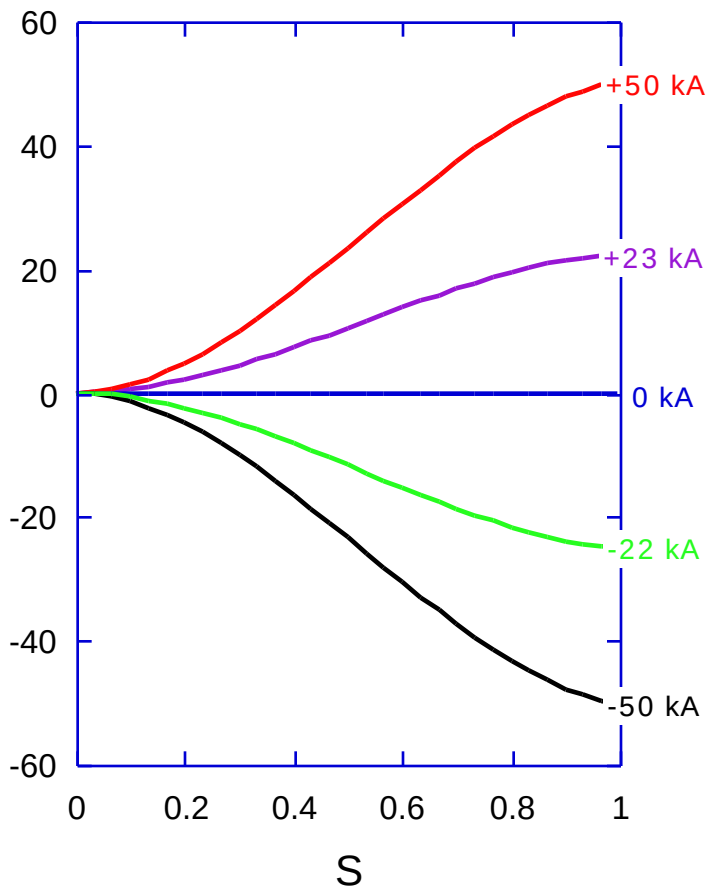

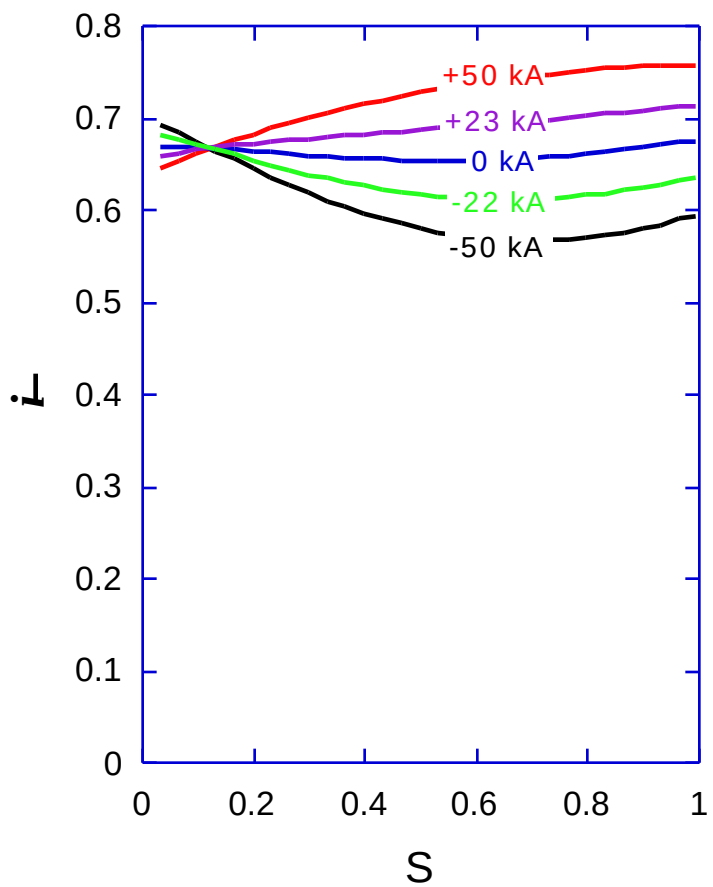

J* contours at ε/μ = 1

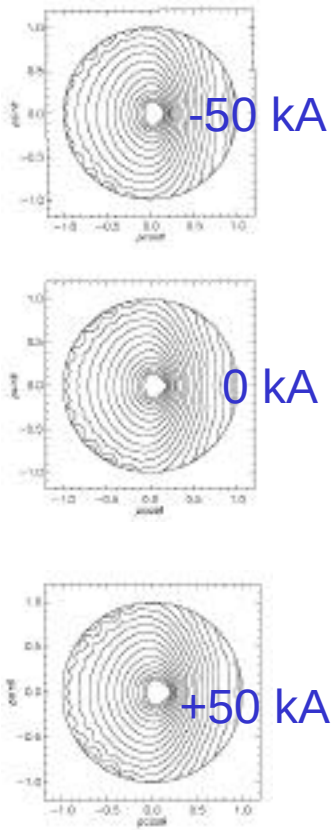

Stability

Ballooning growth rates can be a sensitive function of the pressure profile and matching point position along the field line. Recent pressure profile optimizations for the 3 period device have gotten the β limit up to 3%

$N_{fp} = 3$

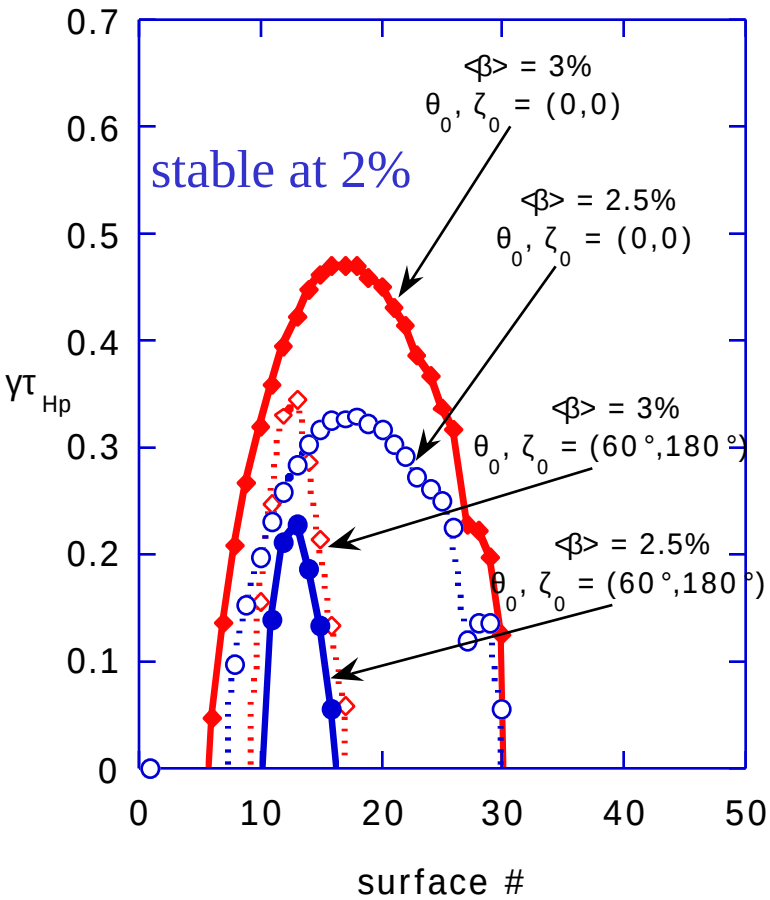

$N_{fp} = 4$

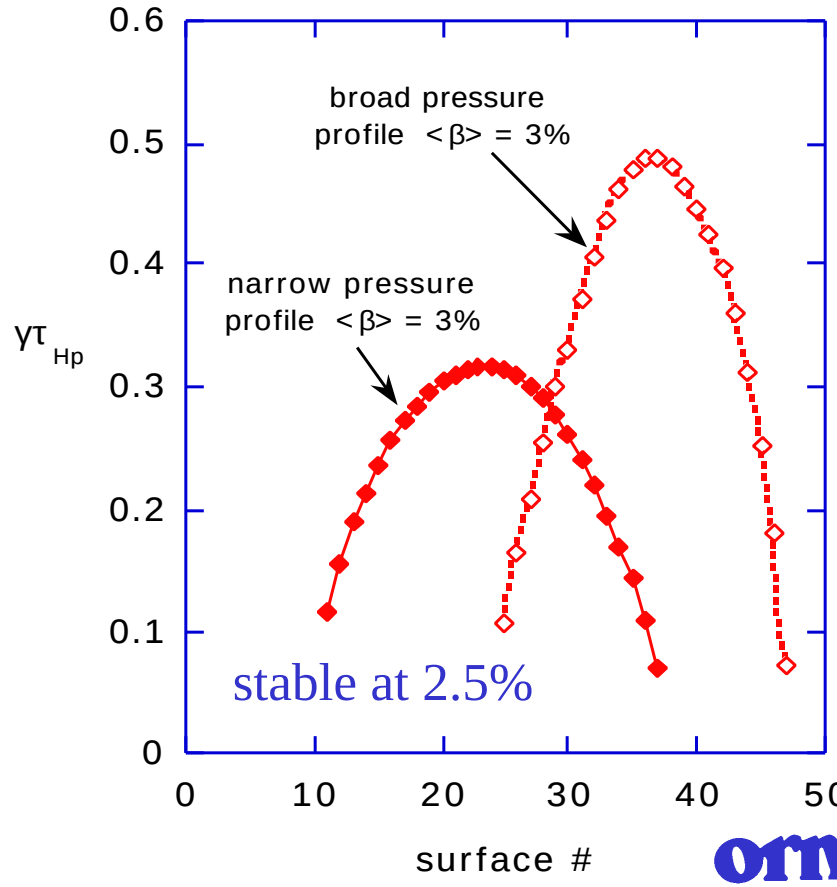

The first step of ballooning β optimization (profile modification) has recently been completed, leading to ~20% increase in the stable β:

QOS CONFIGURATION: M=3 ,<β>=3%, A=3.2

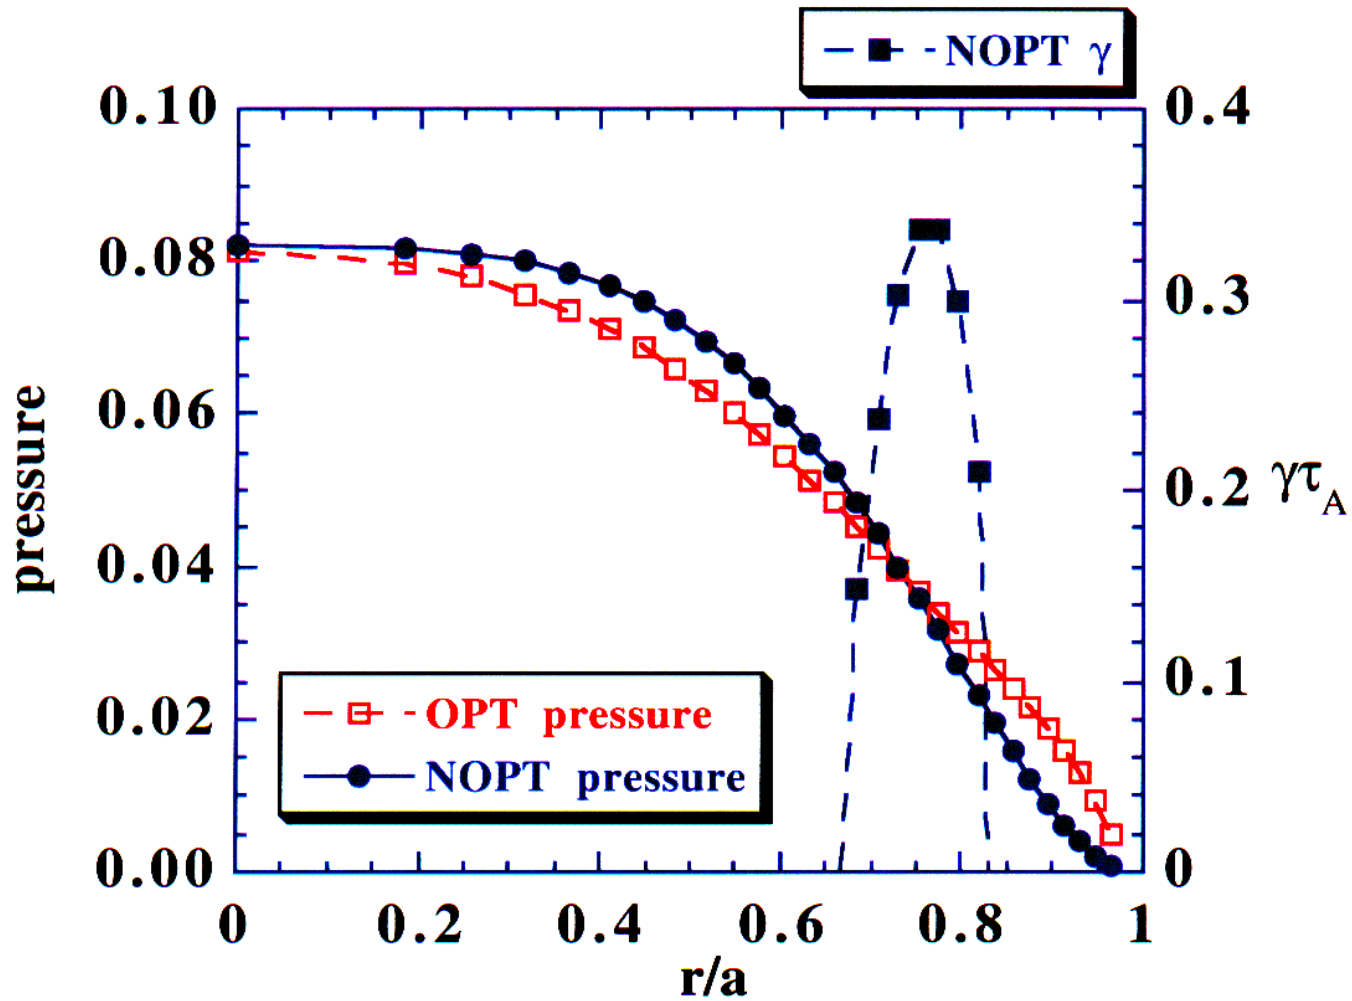

ornl

Areas for Further QOS Development

- **Optimization:** self-consistent bootstrap current and ballooning stabilty improvement
- **Neoclassical transport:** further improvement to allow better exploration of improved confinement regimes?
- **Fast ion confinement:** sufficient for bulk ICRF heating
  - better confinement of energetic perpendicular ions needed to explore minority species heating?
- **Beta limit:** increase $<\beta>$ limit above 3% for better experimental test of reduction of bootstrap current and of beta limit dependence on magnetic configuration properties?
- **Modular coils:**
  - 5 instead of 7 coils per period for better experimental access?
  - reduce minimum bend radius for easier fabrication?

ornl

CONCLUSIONS

- Progress has been made with the preliminary design phase for a small scale QO concept exploration experiment (R_0 = 1m, B_0 = 1T)
  - 5-7 modular coils per period - good flux surface reconstruction
  - good neoclassical transport ($\tau_{E,neo} \approx 2\text{-}3 \times \tau_{E,ISS95}$)
  - confined ICRF tail - efficient heating
  - can suppress/control bootstrap currents
  - ballooning $\langle\beta\rangle \approx 2 - 3\%$ - appropriate range for experimental tests
- Unique features of QO devices
  - good test-bed for RF heating
    - optimized for confinement of high v trapped particles
    - high field access
  - can be designed to access $0.5 < i < 1$
  - rotational transform comes predominantly from coils